

TEES

The "C" after 1/4" indicates that the connection is suitable to fit the access valve.
The "N" after 1/4" indicates the presence of the nut.


CONICAL COPPER GASKETS FOR SAE FLARE CONNECTIONS

Code	Model	Flare	Weight g x 100 pc	Min. Qty
14020035	B2-4	1/4"	27	100
14020043	B2-5	5/16"	30	100
14020036	B2-6	3/8"	50	100
14020044	B2-8	1/2"	66	100
14020045	B2-10	5/8"	85	100
14020046	B2-12	3/4"	182	100



SAE FLARE CAPILLARY ADAPTORS WITHOUT DEPRESSOR

Code	Model	ØA mm	ØD mm	L mm	Weight
06052001	87A	60	1/4"	1000	85 g
06052002	87B	60	1/4"	500	65 g




TEES

Code	Model	L mm	1 NTP	2 flare	3 flare	Weight	Min. Qty
05059008	889/02	45	1/8"	1/4"C	1/4"C	25 g	100
05108112001	889/02K	45	1/8"	1/4"C	1/4"C	250 g	10

Code	Model	L mm	1 flare	2 flare	3 flare	Weight	Min. Qty
05057061	890/02	45	1/4"C	1/4"C	1/4"	25 g	100
05108113001	890/02K	45	1/4"C	1/4"C	1/4"	250 g	10

Code	Model	L mm	1 flare	2 flare	Weight	Min. Qty
05057001	892/02	40	1/4"C	1/4"C	20 g	100

Code	Model	L mm	1 flare	2 flare	Weight	Min. Qty
05057034	T6-4C/01	46	1/4"C	1/4"C	37 g	100
05108114001	T6-4C/01K	46	1/4"C	1/4"C	370 g	10

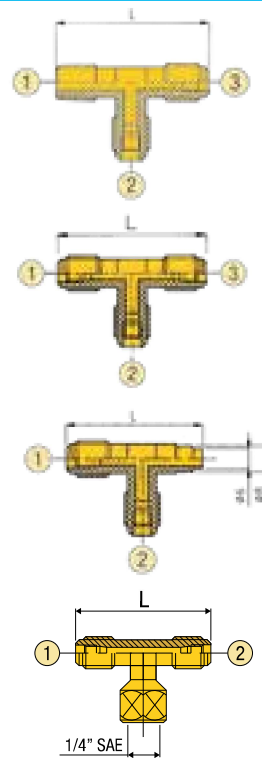

TEES WITH SWIVEL NUT

Code	Model	L mm	1 flare	2 flare	3 flare	Weight	Min. Qty
05057029	891/02	52	1/4"N	1/4"C	1/4"C	47 g	100
05108115001	891/02K	52	1/4"N	1/4"C	1/4"C	470 g	10

